

Titan

Bridgelux COB LED Chip | Meanwell TUV Certified Driver | Easy Install

Applications

- Skylinepro LED Wallpack
- Direct replacement for Metal Halide and Sodium
- Vandal proof exterior
- Replacement LED for:
 - Doorways
 - Walkways

Specification

- Efficacy (lm/W): 85
- Voltage (V AC): 100 - 240
- Frequency (Hz): 50
- Power Factor: >0.9
- Input Power: 30W
- IP: 65
- LMR: 80*
- Viewing Angle (°): 120
- Colour Temperature: 4200k
- Colour Rendering (Ra): 85*
- Average Life (hrs): 50,000
- Operating Temperature (°): -30 to +35
- Lumens: 2,550
- Die Cast Aluminium Base/PVC Hinged Cover

* Exceeds EU standard




Options

- E3 -3 hour emergency pack



Ordering Information

Variant Code	Lamp	Power (w)	mm		
			Length	Width	Depth
TIT-30-4-98	LED	30	309	264	115
TIT-30-4-98-E:	LED	30	309	264	182

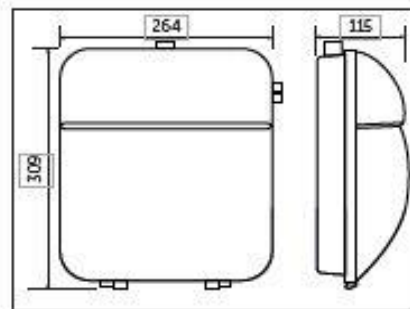

5 years

